


Acefast M9-5000 USB-C PD 20W Fast Charging Power Bank 5000mAh



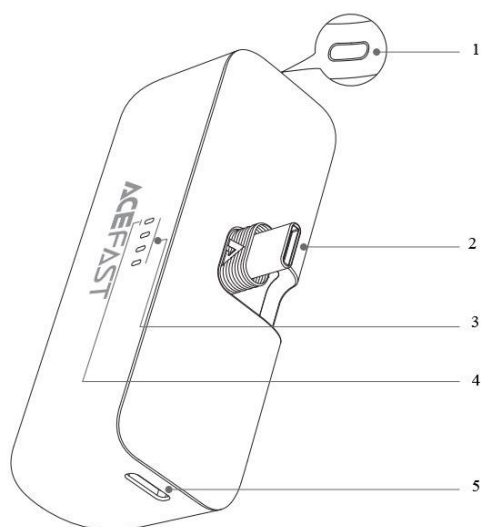

1. Power button
2. USB-C1 PD fast input / output
3. Battery charge level LED indicator
4. Fast charging mode LED indicator
5. USB-C2 PD fast input / output

Specifications

Capacity - 5000mAh, rated capacity: 2600mAh

USB-C1 / C2 input - 5V-3A, 9V-2A, 12V-1.5A - 18W (max)

USB-C1 output - 5V-3A, 9V-2.22A, 12V-1.67A - 20W (max)

USB-C2 output - 5V-3A, 9V-2.22A, 12V-1.67A - 20W (max)

Total output - USB-C1 + USB-C2: 5V-3A - 15W (max)

Support fast charge protocols

USB-C1 / C2 - PPS / iP2.4A / SAM 5V-2A / DCP / QC2.0 / QC3.0 / QC4+ / AFC / FCP / SCP / PD2.0 / PD3.0

Light indicator

Battery charge level LED indicator:

- 0-25%: LED 1 flashing (Fast charging: green; Slow charging: white)
- 25-50%: LED 2 flashing: 51-75%: LED 3 flashing
- 76-99%: LED 4 flashing
- 100%: All 4 LEDs solid

Fast charging mode LED indicator:

- 76-100%: All 4 LEDs solid; 51-75%: LED 4 off
- 26-50%: LED 3 off; 6-25%: LED 2 off
- 1-5% LED 1 flashing (Fast charging: green flashing; Slow charging: white flashing)
- 0%: All LEDs off

Instructions:

1. Use the cable (included) to connect the power bank to the mobile phone.
2. Once the cable is connected, it will automatically match the parameters for charging the smartphone. If the matching is unsuccessful, you can press the power button to start charging the phone.
3. Connect the cable to the power adapter and the input interface of the power bank to charge the power bank.
4. Single-click the button to check the battery level, double-click to turn off and enter standby mode.

Notice:

- Before using the power bank, please carefully read the user manual and the surface markings of the power bank.
- This product has a built-in temperature control program. When the temperature exceeds the set value, the indicator light will flash, output will pause, and it will automatically charge when the temperature decreases.
- Please use the power bank in a normal, indoor environment. Temperature: -20 to +35°C, relative humidity: 65±20%.
- During use, keep away from heat sources and high voltage, avoid children playing with the power bank. Do not drop the power bank. Do not charge the power bank in a charger for more than 23 hours.
- Do not short-circuit the positive and negative terminals of the power bank, do not disassemble or assemble the power bank by yourself, and do not let the power bank get wet to avoid danger.
- When not in use for a long time, please store the power bank properly. Keep the power bank in a semi-charged state, neither fully charged nor completely discharged, and store the power bank in a cool, dry place.
- Please dispose of the power bank safely and properly. Do not throw it into fire or water.