

C315 4-Channel WiFi Dash Cam with 360 Coverage





Scan the QR code to download this dash cam's APP (not for non-WiFi products). For connection steps, see Section 4 of this manual.

1. Button Functions and Operation Instructions

OK Button

Function 1: In standby/recording mode, press the "OK Button" to start/stop recording. In system settings, file management, and playback mode, it can be used to confirm and select functions.

Menu Button

Function 1: Short press to change recording mode or playback mode.

Function 2: Long press into the system setting menu.

Function 3: When browsing videos and photos, you can select to delete or lock the current file.

Power Button

Function 1: In the power-off state, press and hold the "Power Button" for 2 seconds to turn on the device, which will then start working automatically. In the power-on state, press and hold the "Power Button" for 2 seconds, and the device will automatically save the video files and user settings before shutting down.

Function 2: Turn off the display screen function. At the power state point press "Power Button" the machine will turn off the display and again press on the display.

Reset Button

Function 1: Press the Reset hole once with a sharp, thin object (e.g., a needle or pin), and the dash cam will restart automatically.

Down Button

Function 1: In standby and recording modes, press this button to cycle through the images from each camera.

Function 2: In menu mode, it can be used to select the next menu or play the next file.

Up Button:

Function 1: In standby and recording modes, press once to turn on Infrared Night Vision, and press again to turn it off.

Function 2: In menu and playback modes, it can be used to select the previous menu or play the previous file.


2. Installation guide

- Please test the normal operation of the rear-view camera first before installation (if there is a rear-view camera; ignore this if there is none);
- Turn off the car engine;
- Insert the TF card into the dash cam's card slot.

[Note] Please use a high-speed TF card (Class 10 or above), with a capacity of not less than 4 GB and not more than 256GB. Devices usually use 32G or 64G;

- Fix the dash cam on the car's front windshield through the bracket;
- Insert the car charger into the car's cigarette lighter socket;

[Note] When routing the cable, the extended charging cable can be laid along the edge of the car door frame and under the car carpet; refer to the diagram below.

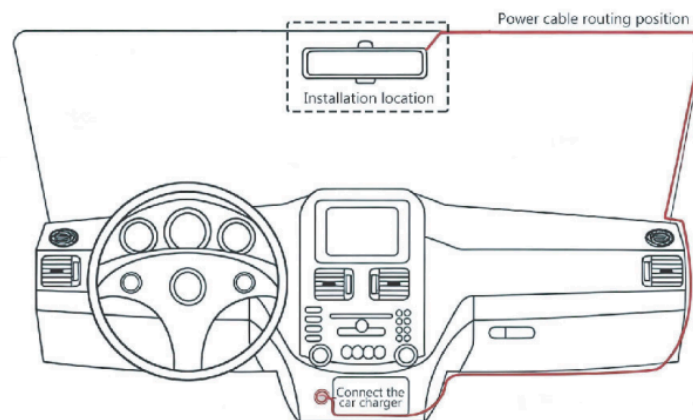

- Install the rear camera at the rear of the vehicle, and pay attention to the up and down direction installation. The cable can be laid along the top edge of the vehicle.


[Note] There are two installation methods for the rear camera: Refer to the diagram below.

A. Attach it to the top of the car's rear glass, which can be installed by yourself (the reverse viewing function cannot be realized, only real-time video recording of the rear of the car is available);

B. Ask professional installers to install above the license plate frame, and at the same time, the camera needs to be connected to the reverse light power supply (the reverse viewing function can be realized).

Rear camera installation diagram

The rear camera provides position A and position B

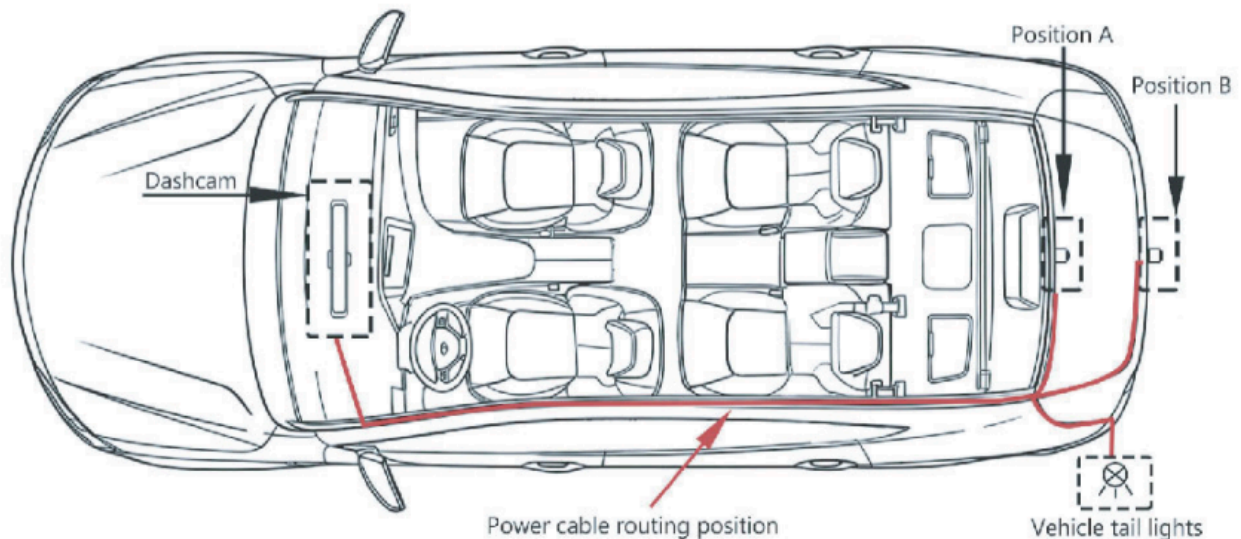

- Adjust the position of the lens to set the camera angle to the best shooting perspective;
- Start the engine and check if the device is working normally.

Frequently Asked Questions

Problem: The device shows the prompt "File Error"

- Solution: Go to Settings Menu → Restore Factory Settings, then format the memory card. This problem is usually related to the TF card.

Problem: Horizontal stripe interference appears on the screen

- Solution: Select the correct power supply frequency: 50 Hz (PAL).

Problem: How to correctly enable the 24-hour parking monitoring function

- Solution: Do not enable it during normal driving, as it may cause the device to shut down automatically or crash. It only needs to be enabled after parking. Use a step-down cable or a mobile power supply.

Problem: The image captured at night is not clear enough

- Solution: The dash cam relies on strong external light sources, such as streetlights and car lights, when recording at night. This is common in the industry.

Problem: The device always reverts to the default date and time

- Solution: Fully charge the device while it is turned off. You can use a car charger or a mobile power supply to charge it.

Problem: What causes missing seconds in video files?

- Solution: Turn off motion-detection recording and enable the loop-recording function. When using your own memory card, make sure it is a genuine Class 10 high-speed card.

Problem: Why does the device suddenly shut down during recording?

- Solution: First, turn off the parking-monitoring function. Automatic shutdown may also occur when the temperature in the operating environment exceeds 70°C (158°F).

Note: Experience has shown that most problems are related to the memory card, while a small number are related to the power cable.

Wi-Fi connection and APP control



1. Download Viidure APP

Method 1: Scan the QR code below to download Viidure APP.

Method 2: You can search for "Viidurein" , the Android APP.

Store or the iOS AppStore and download it.

2. Connect to the dash cam

- Open the WiFi connection mode
 - A. Long press the UP button and the dash cam will automatically activate WiFi connection mode.
 - B. Enter the system menu and then turn on WiFi connection mode.
- Open the Viidure APP and operate as shown below. (2.2)
- Go to the WiFi connection page on your mobile phone, find the WiFi SSID corresponding to the dash cam, and enter the WiFi password: 12345678 to complete the WiFi connection. (2.3)
- Return to the Viidure APP, where you can view recorded videos and set up the dash cam. (2.4)

3. View Recorded Videos (4.3)

Click "Camera Files" below to view recordings.

Note: Videos played on the phone are compressed. For original HD versions, download to your phone first.

4. Download Videos (4.4)

Select desired video(s) and tap the "Download" icon at the bottom to download.

5. Set Up the Dash Cam via the APP (4.5)

Click "Camera Settings" at bottom right to access settings.

Specific parameters are as follows:

6. Return to key operation

When your phone is connected to the dash cam, the dash cam cannot be operated. To switch back to operating the dash cam:

Method A. Exit the Viidure APP on your phone;

Method B. Press and hold the dash cam's UP button for 3 seconds, then select "Exit".



4.2.2

4.2.3

