

HS09 Wireless Bluetooth Temperature & Humidity Sensor




How it works

- Bluetooth gateway is required.
- Install the battery to the device successfully, and ensure that the mobile phone is connected to the network and the smart gateway has been successfully added;
- Open the App, on the “Smart Gateway” page, click the “Add Sub Device” button, and select “Temperature and Humidity Sensor”;
- Press and hold the reset function key for more than 5 seconds until the indicator light flashes, then follow the APP instructions to add the device.
- After connecting, enter the APP and click the product icon to the main interface, then wait for updating the locally stored temperature and humidity data (within 1 minute), after the update is completed, the real-time temperature and humidity data will be displayed.


After adding it successfully, you can find the device in the “My Home” list.

Replacing the battery

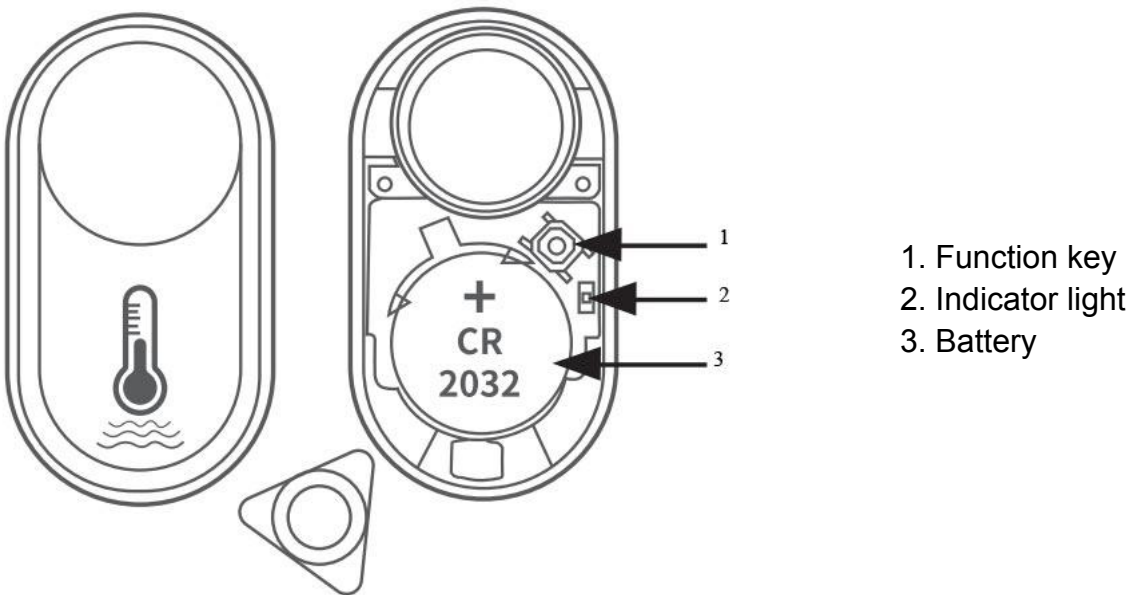

Preparation for use

1.

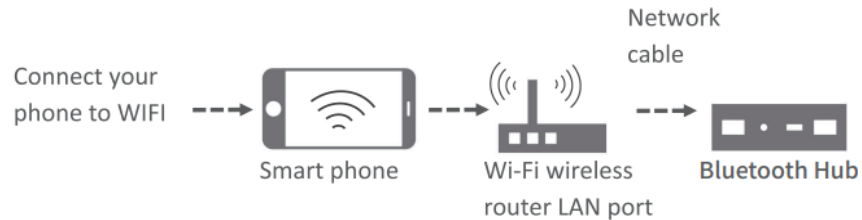

Ensure that the product is within the effective coverage range of the Bluetooth smart gateway network to ensure effective connection between the product and the smart gateway.

Ensure that the smart gateway has been added.

2. Download and open the APP

Search for “Smart Life” in the App store or scan the QR code in the manual to download and install the App. Click the “Register” button to register an account if this is your first time using it; if you already have an account, click the “Login” button.



Scan the QR code to download the "Smart Life" App.