

ARTFONE CF241A





1. Left soft key: Confirm selection / go to menu
2. Camera key: go to camera
3. Right soft key: go back / go to phonebook
4. Green key: make a call / answer a call / check logs
5. Navigation key: go up or down
6. Red key: Power on or off / end a call / return to the standby interface
7. Speed dial (M1 and M2): Long press to add contact from phonebook, than call it directly
8. SMS key: one touch to go to inbox
9. * Key: Long press to go to FM radio
10. # Key: Long press to go to "Meeting mode" or "General mode"
11. + Key: Volume up
12. - Key: Volume down
13. Flashlight button

Icon description



Shows actual GSM signal



Unread message



Shows normal profile




Headphones plugged-in



Alarm is set up



Enabled Bluetooth



Battery status

LED indicator lights



There are two LED indicator lights. The first one indicates incoming calls, while the second one is for SMS. During the charging process these LED lights will blink alternately.

How to power on?

Press the red button for 2.5 seconds.

How to power off?

Make sure the keypad is unlocked, then press the red button for 2.5 seconds.

How to use a flashlight?

Just press the No.15 button on the side to turn on or turn off the flashlight.

How to use the SOS function?



- Status: Set the function on or off here:
- SOS numbers: This is very important, you can set no more than 5 telephone numbers here. When you press the SOS button, the phone will dial the numbers one by one automatically.
- SOS SMS: You can edit SMS
- SOS SMS ON/OFF: You can turn on or off SOS message

How to make a call?

1. Speed dial: press M1/M2, or long press numbers 1-9
2. Input a telephone number and press the left green button
3. Find a contact in the phonebook and press the left green button
4. SOS special dial: press the SOS button and the phone will dial pre-set SOS number automatically

Volume adjustment

Press the side button + or - to adjust the volume.

How to change ringtone/message tone/volume?


Go to Settings → Profiles → General → Customize

Restore to factory settings:

Settings → Phone settings → Restore factory settings → Password is 1234

FAQ

1. SIM card: supports nano and micro SIM, but it is best to use a standard SIM card.

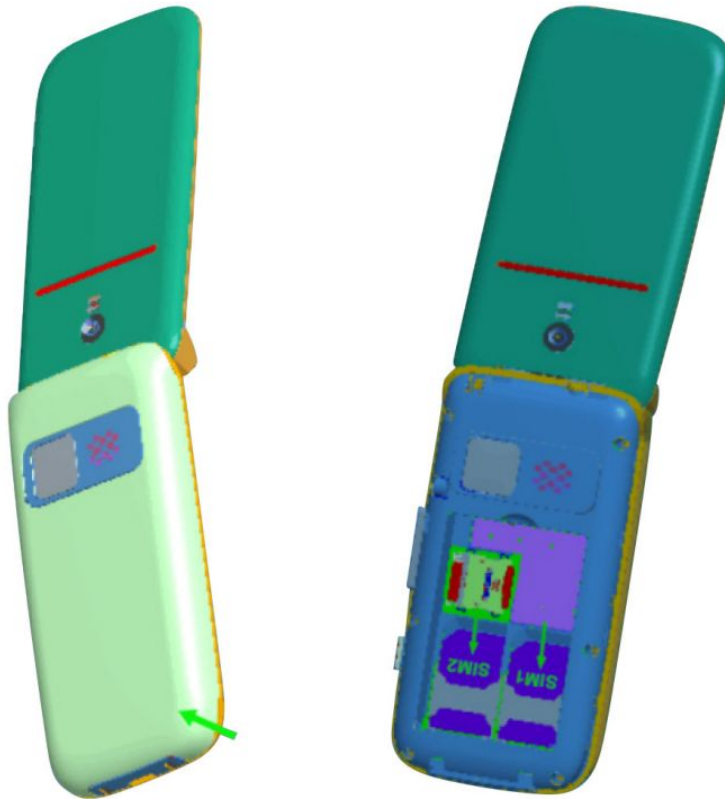

2. Does this phone work on 3G network?
No, it is 2G GSM phone, supports quad bands: 850/900/1800/1900
3. Is the phone unlocked?
Yes, all Artfone phones are unlocked and work well on 2G GSM networks around the world.
4. Does the phone packaging include earphones?
No, but it has the 3.5mm port, compatible with most earphones on the market.